




STUBBE'S
PRECAST

WHISPERCRETE

FEATURES

- Post and panel system
 - Optimum post spacing of 4.88 m (16')
 - Panel heights of 0.5 m (1.64') and 1.0 m (3.28')
 - Wall heights up to 13.5 m (44.3')
- Single-sided absorptive panels with a minimum NRC of 0.70 or double-sided concrete panels (reflective)
- Hot dipped galvanized steel or concrete posts
- STC rating: up to 49
- Panels manufactured in a CPCI certified Ontario Plant
- Approved MTO DSM #5.50.20 for precast noise barriers
- Wide spectrum of patterns, textures, and colours
- Walls can be designed with integrated retaining panels
- Turnkey packages available from initial design through to complete installation

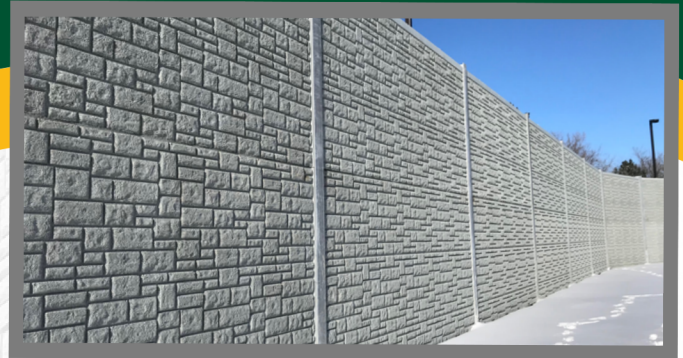

APPLICATIONS

- Roads and highways
- Rail corridors
- Generator or transformer enclosures
- Industrial and commercial developments
- Residential developments
- Security barriers

CALL US FOR MORE INFO



519-424-2183



estimating@stubbes.org



www.stubbes.org